



## OKS 410 MoS<sub>2</sub> High-Pressure Long-Life Grease

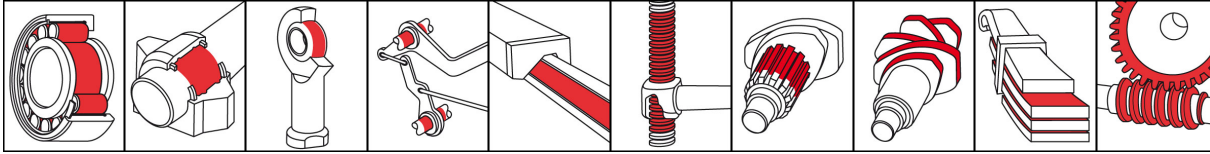

### Description

OKS 410 is a high-pressure long-life grease for lubrication points subjected to pressure or impacts also under outdoor exposure.

### Applications

- Grease lubrication of unsheltered parts subject to heavy loading and/or impacts, such as friction, rolling and pivoting bearings, splined shafts, knockout spindles, threaded spindles and sliding surfaces of all kinds
- For harsh operating conditions

### Advantages and benefits

- Excellently suited as a safety lubricating grease in mixed friction sector with especially good wear protection
- Effectively protects against corrosion
- Contains Mox-active to improve performance

### Branches

- Municipal services
- Chemical industry
- Glass and foundry industry
- Rail vehicle technology
- Logistics
- Iron and steel industry
- Rubber and plastic processing
- Shipbuilding and marine technology
- Plant and machine (tool) engineering
- Paper and packaging industry

### Application tips

For best results clean the lubricating point carefully. Clean with solvents like OKS 2610/OKS 2611 Universal Cleaner. Remove the corrosion protection ahead of the initial filling. Fill the bearings in a way that all the functional surfaces for sure get the grease. Slow moving bearings (DN-value < 50,000) should be filled completely, normal moving bearings should be filled to 1/3 of the free inner housing space. Observe the instructions of the bearing or machine manufacturer. Relubrication with a grease gun on to the grease nipples or with an automatic lubrication system. Relubrication intervals and amount to be defined acc. to the service conditions. If the removal of the old grease is not possible the amount of grease has to be limited to avoid excess lubrication of the bearing. At longer relubrication intervals a complete exchange of the old grease is recommended. Only mix with appropriate lubricants.



## PRODUCT INFORMATION

# OKS 410 MoS<sub>2</sub> High-Pressure Long-Life Grease

### Packaging

- 400 ml Cartridge
- 1 kg Can
- 5 kg Hobbock
- 25 kg Hobbock
- 180 kg Drum

### Technical Data

	Standard	Conditions	Unit	Value
<b>Main components</b>				
base oil				mineral oil
thickener				lithium hydroxystearate
solid lubricants				MoS <sub>2</sub>
additives				Mo <sub>x</sub> -Active
<b>Application related technical data</b>				
marking	DIN 51 502	DIN 51 825		KPF2K-20
viscosity at (40°C)	DIN 51 562-1	base oil	mm <sup>2</sup> /s	185
viscosity at (100°C)	DIN 51 562-1	base oil	mm <sup>2</sup> /s	14
pour point	DIN ISO 3016	3°C step	°C	-20
flashing point	DIN ISO 2592	> 79	°C	> 230
drop point	DIN ISO 2176		°C	> 200
consistency	DIN 51 818	DIN ISO 2137	NLGI grade	2
worked penetration	DIN ISO 2137	60 double strokes	0.1 mm	265-295
penetration drop	DIN ISO 2137	100,000 double strokes	0.1 mm	< 30
lower operating temperature	DIN 51 805	≤ 1400hPa	°C	-20
upper operating temperature	DIN 51 821-2	F50 (A/1500/600), 100h	°C	130
maximal operating temperature			°C	140
colour				grey
density (at 20°C)	DIN EN ISO 3838		g/cm <sup>3</sup>	0.92
water resistance	DIN 51 807-1		Degree	1-90
DN value (dm x n)			mm/min	500,000
four-ball test rig welding load	DIN 51 350-4		N	3,600
four-ball test rig wear	DIN 51 350-5	1.420/min, 1h, 800N	mm	0.4
SKF-EMCOR	DIN 51 802		corr. degree	1
<b>Product specific technical data</b>				
SKF R2F	DIN 51 806	2500/min, 20d, 20°C (Running test A)		passed
SKF R2F	DIN 51 806	1500/min, 20d, 120°C (Running test B)		passed
Timken	SEB 181 302	43lbs	mg	> 5

### OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47  
82216 Maisach  
Phone: +49 (0) 8142 3051 - 500  
info@oks-germany.com  
[www.oks-germany.com](http://www.oks-germany.com)



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark  
**Safety data sheet** for industrial and commercial users is available for downloading under [www.oks-germany.com](http://www.oks-germany.com). Our Customer and Technical service will be pleased to help should you have any further questions.