



OKS 404

High-Performance and High-Temperature Grease

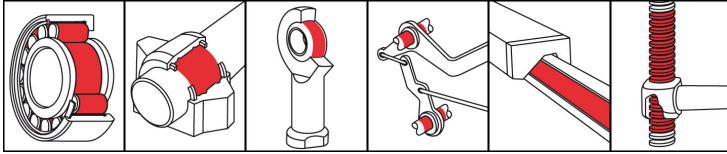

Description

Semi-synthetic lithium complex soap grease with a wide range of applications in a wide range of temperatures.

Applications

- Lubrication of friction, rolling and pivoting bearings, splined shafts, knockout spindles and sliding surfaces of all kinds under heavy loads and a broad temperature range, as well as all sliding speeds permissible for grease lubrication

Advantages and benefits

- Modern grease with a wide range of applications
- Supports sealing of bearings
- Good corrosion protection
- Resistant to ageing and oxidation
- Good resistance to pressure and water
- Available in the 120 cm³ ChronoLube cartridge

Branches

- Shipbuilding and marine technology
- Logistics
- Paper and packaging industry
- Municipal services
- Plant and machine (tool) engineering
- Chemical industry
- Rubber and plastic processing
- Iron and steel industry
- Glass and foundry industry
- Rail vehicle technology

Application tips

For optimum effect, carefully clean the lubricating point, for example with OKS 2610/OKS 2611 universal cleaner. Before filling for first time, remove anti-corrosion agent. Fill the bearing such that all functional surfaces are certain of being greased. Fill normal bearings up to about 1/3 of the free space inside the bearing. Low-speed bearings (DN value < 50,000) and their housings should be filled completely. The bearing and machine manufacturer's instructions should be observed. Subsequent lubrication at the lubrication nipples by grease gun or by automatic lubrication system. Assess the lubrication frequency and quantity on basis of service conditions. If old grease cannot be removed, restrict the quantity of grease so as to avoid overlubricating the bearing. If lubrication frequencies tend to be low, you should aim for a full grease change. Only mix with suitable lubricants.



PRODUCT INFORMATION

OKS 404

High-Performance and High-Temperature Grease

Packaging

- 400 ml Cartridge
- 1 kg Can
- 5 kg Hobbock
- 25 kg Hobbock
- 180 kg Drum

Technical Data

	Standard	Conditions	Unit	Value
Main components				
base oil				polyalphaolefine
base oil				mineral oil
thickener				lithium-complex soap
Application related technical data				
marking	DIN 51 502	DIN 51 825		KP2P-30
viscosity at (40°C)	DIN 51 562-1	base oil	mm ² /s	100
viscosity at (100°C)			mm ² /s	14
flashing point	DIN ISO 2592	> 79	°C	> 200
drop point	DIN ISO 2176		°C	> 260
consistency	DIN 51 818	DIN ISO 2137	NLGI grade	2
worked penetration	DIN ISO 2137	60DH	0.1 mm	265-295
resistance to oxidation	DIN 51 808	100h/100°C	bar	< 0.3
lower operating temperature	DIN 51 805	≤ 1400hPa	°C	-30
upper operating temperature	DIN 51 821-2	F50 (A/1500/6000), 100h	°C	150
maximal operating temperature			°C	200
colour				light-coloured
density (at 20°C)	DIN EN ISO 3838		g/cm ³	0.93
water resistance	DIN 51 807-1	90°C	Degree 0-3	1
DN value (dm x n)			mm/min	350,000
four-ball test rig welding load	DIN 51 350-4		N	2,800
four-ball test rig wear	DIN 51 350-5	1.420/min, 1h, 800N	mm	< 0.8
SKF-EMCOR	DIN 51 802		corr. degree	0
SKF-EMCOR Copper	DIN 51 811	24h, 100°C	corr. degree	1

OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47
82216 Maisach
Phone: +49 (0) 8142 3051 - 500
info@oks-germany.com
www.oks-germany.com



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark
Safety data sheet for industrial and commercial users is available for downloading under www.oks-germany.com. Our Customer and Technical service will be pleased to help should you have any further questions.